

Introduction

► Feature

Line pull (1 st layer):	22,680 kg / 50,000 lb
Line speed (1 st layer):	5.7 mpm (18.7 fpm) at 100 l / min (26.5 g / min)
Operation pressure:	200 bar (2,900 psi)
Brake:	Multi-disc brake and counterbalance valve providing full 100% braking
Clutch (freespooling):	Air clutch for rapid wire rope payout
Recommended wire rope:	22.4 mm (7/8") x 48 m (157') 1,770 N/mm ² grade a minimum breaking strength of 305 KN required for SAE J706 ratings
Hydraulic system:	PTO/power take off unit driven pump

► Unpacking

• Winch assembly.....	1pc
• Roller fairlead.....	1pc
• Counterbalance valve.....	1pc
• Cable tensioner.....	1pc

► Read this manual carefully

You should carefully read and understand this manual before operating it. Careless winch operation may result in personal injury hazards or property damage.

► Information requesting or parts ordering

Please specify the followings information:


- Winch PN
- Part description
- Serial number
- Replacement part number
- Quantity for each part

Installation


Before using the winch, make sure all components have no corrosion or damaged; the environment should be clear and dry.

► Mounting

- Winch shall be mounted on a flat and hard surface.
- Winch should be mounted as closed to center and as perpendicular as possible to the direction of the line pull.
- Wire rope shall be wound in an under-wound orientation only.
- Eight (8) M20 x 50, 12.9 grade high tensile steel bolts must be used in order to sustain the loads imposed on the winch.
- Two (2) M10 X 30, 12.9 grade high tensile steel bolts must be used to fasten the roller fairlead to the mounting channel.
- It is always preferred to use both tie bars in the final installed configuration.
- If there is a rope pileup on one end of the drum, reverse the winch to relieve the load and move your anchor point further to the center of the vehicle. Then you can rewind for a neat layer of the rope.



► Hydraulic System

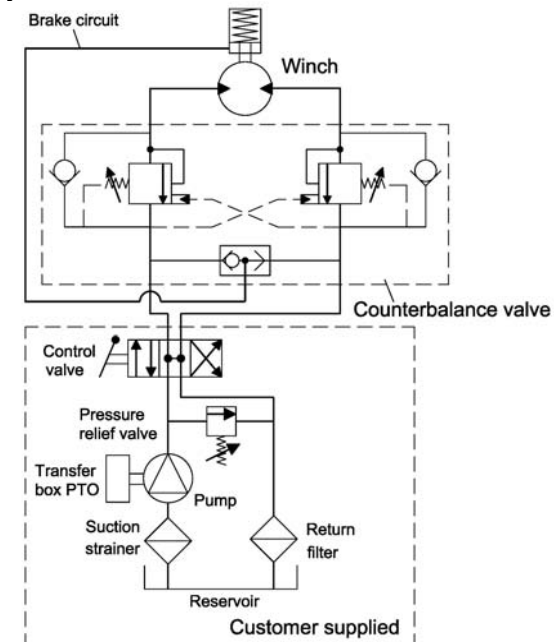

(Powered by PTO / power take off unit driven pump)
The installation of the counterbalance valve supplied is required for 100% braking

Warning

- This winch shall only be used for vehicle recovery or for pulling and lowering boats off trailers.
- The rated line pull and speed are based on the first layer of rope on the drum.
- The rope winding on the drum shall remain 5 wraps from the drum.


Warranty

Comeup Industries Inc. takes the responsibility for all parts and components to be free from defects in materials and workmanship appearing under normal use for one year from the date of purchase.

Parts List

Item No.	Description	Part No.	Qty
1	Hydraulic motor kit for OMT-250	882798	1
2	Multi-disc brake kit	882783	1
3	Motor support rack kit	882784	1
4	Motor coupling kit	882785	1
5	Drum bushing	882786	2
6	Drum kit	882787	1
7	Tie bar kit	882788	2
8	Gearbox support rack kit	882789	1
9	2 nd stage carrier	882790	1
10	1 st stage carrier	882791	1
11	1 st shaft kit	882792	1
12	1 st gear	882793	1
13	1 st & 2 nd ring gear kit	882794	1
14	Gearbox rear cover kit	882795	1
15	Air inlet cover kit	881982	1
16	Cable tensioner	882796	1
17	Roller fairlead	882797	1

Winch Assembly

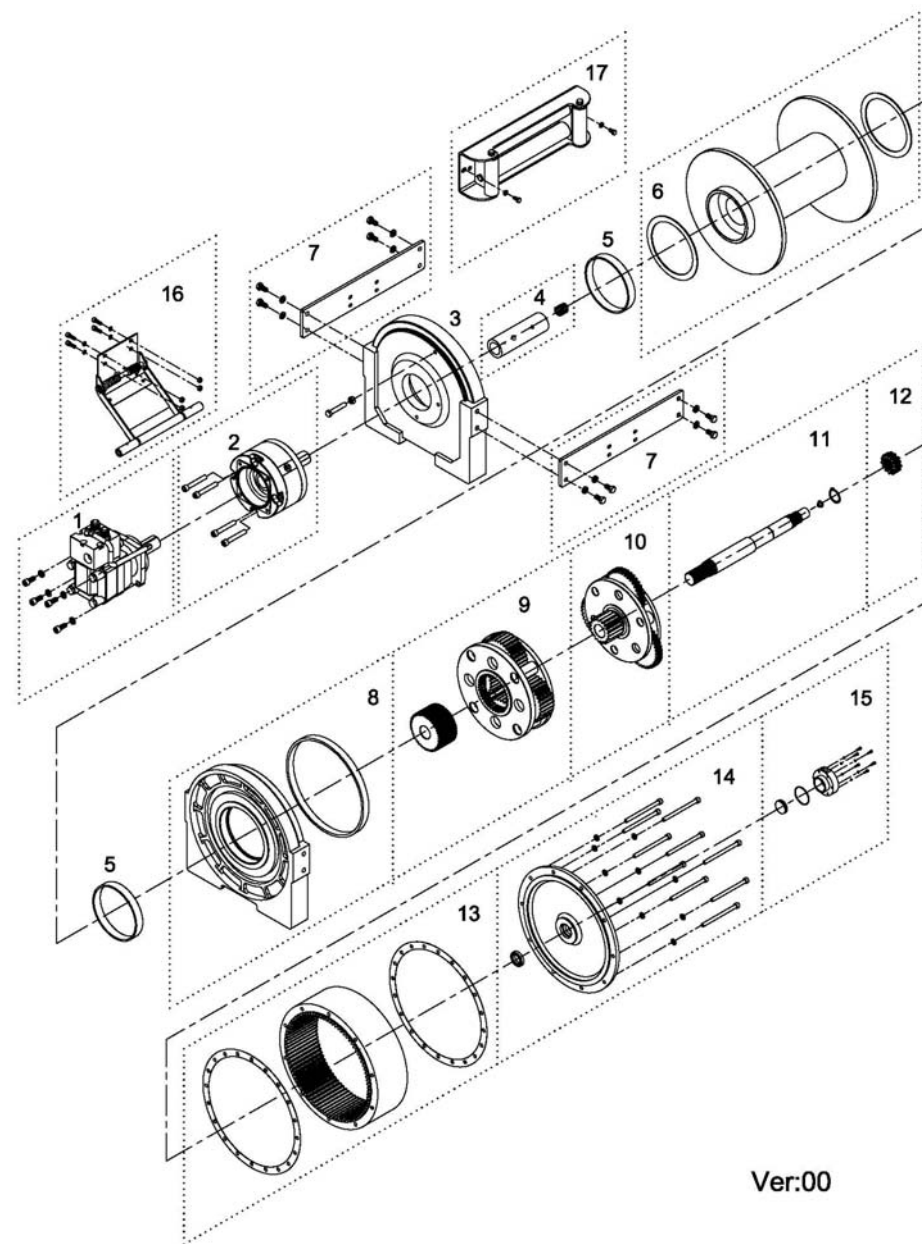

Ver:00